



# Componex Mini-Meters - stock range

## Battery level / status Indicators

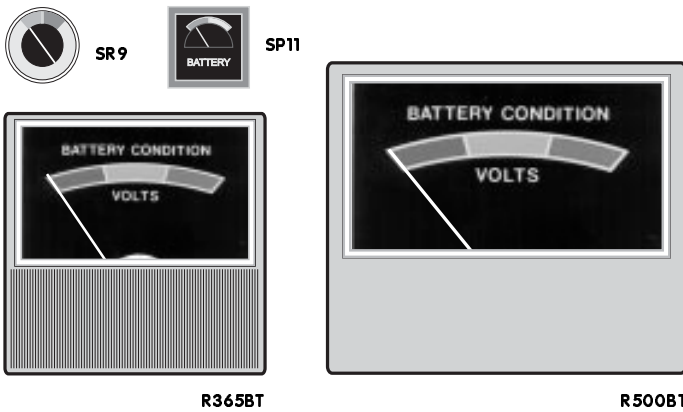

- **Minature and standard sizes**
- **Ideal for portable equipment**
- **Low cost solution**
- **Minimum depth**
- **Very robust**
- **Ex-stock availability**

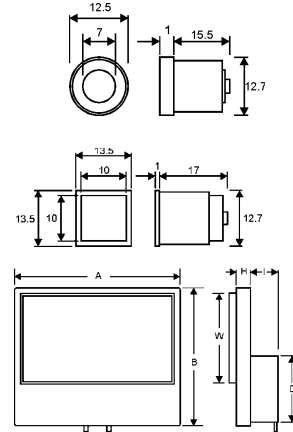


These rugged and reliable battery status meters are suitable for a wide range of applications. Using external resistors the required voltage range can be set. By adding a suitable zener diode it is possible to measure a particular voltage over a wider span of the meter scale.

Order Code	Sensitivity $\pm 20\%$	Resistance $\pm 15\%$	Rec. Price £:	1+	5+	10+	25+	50+	100+
SR9	0-500 $\mu$ A	700 $\Omega$							
SP11	0-1mA	345 $\Omega$							
R365BT	0-250 $\mu$ A	700 $\Omega$							
R500BT	0-250 $\mu$ A	650 $\Omega$							


Dimensions mm	A	B	W	D	H	I
R365BT	40.00	40.00	21.5 x 36.5 x 3.0	20.00	8.00	12.50
R500BT	55.00	47.50	50.0 x 28.0 x 3.0	18.50	7.00	14.00

## Edgewise level and balance Indicators

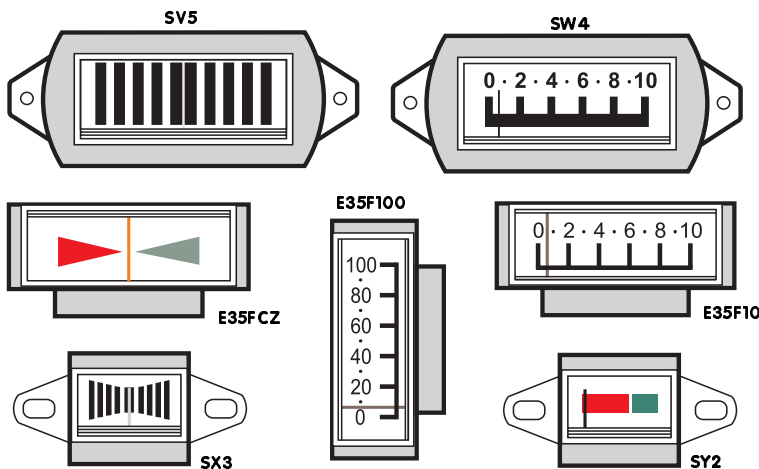

- **Compact edgewise design**
- **Professional appearance**
- **Low cost solution**
- **Easy to back light**
- **Minimum depth**
- **Ex-stock availability**

A wide range of left hand zero and centre zero meters providing low cost indication.

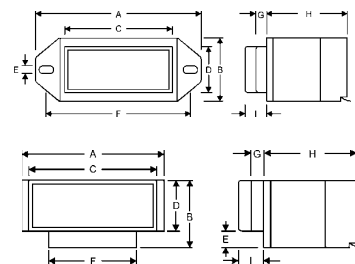

Order Code	Sensitivity $\pm 20\%$	Resistance $\pm 15\%$	Rec. Price £:	1+	5+	10+	25+	50+	100+
SY2	0-200 $\mu$ A	600 $\Omega$							
SX3	0-200 $\mu$ A	600 $\Omega$							
SW4	0-250 $\mu$ A	600 $\Omega$							
SV5	100-0-100 $\mu$ A	600 $\Omega$							
E35F10	0-100 $\mu$ A	1750 $\Omega$							
E35F100	0-200 $\mu$ A	600 $\Omega$							
E35FCZ	100-0-100 $\mu$ A	600 $\Omega$							

Dimensions mm	A	B	C	D	F	H	I
SY2	36.00	18.20	17.80	12.40	28.50	15.20	4.50
SX3	36.00	18.20	17.80	12.40	28.50	15.20	4.55
SW4	54.00	22.00	35.20	15.20	49.00	25.50	7.00
SV5	54.00	22.00	35.20	15.20	49.00	25.50	7.00
E35F10	39.00	18.50	35.00	14.00	24.00	22.00	4.50
E35F100	39.00	18.50	35.00	14.00	24.00	22.00	4.50
E35FCZ	39.00	18.50	35.00	14.00	24.00	22.00	4.50

AVAILABLE FROM: NATIONAL DISTRIBUTORS OR DIRECT FROM ANDERS IN MULTIPLES OF 10 PCS AND SUBJECT TO A MOQ OF 50 PCS.

DVM\CMMP4B Revision 3 20/07/99

PAGE 4

**anders electronics plc** Bayham Place, London NW1 0EU UK

Tel: +44 (0)20 7380 8167 Fax: +44 (0)20 7874 1908 www.anders.co.uk

Anders Electronics plc (Anders) does not warrant the accuracy or completeness of the information contained herein, the supply of products by Anders is subject to its standard terms and conditions of sale. Prior to concluding any agreement with Anders the customer should satisfy itself of the accuracy and completeness of the information contained herein and should notify to Anders any intended use of the product.

www.anders.co.uk | info@anders.co.uk

